




Features

- Radial leaded devices
- Faster tripping, typical application in micro-motors for automobiles
- Protecting against overcurrent and overtemperature faults
- Available in lead-free version
- Agency Recognition: UL、CSA、TUV



Product Dimensions



| Part number | A | B | C | D | E | F | Lead | |
|-------------|------|------|------|------|------|------|-------|---------|
| | Max. | Max. | Typ. | Min. | Max. | Typ. | Style | Size(φ) |
| DWP16-075F | 6.4 | 11.4 | 5.1 | 7.6 | 3.0 | 0.9 | 3 | 0.5 |
| DWP16-090F | 6.0 | 14.0 | 5.1 | 7.6 | 3.0 | 0.9 | 1 | 0.5 |
| DWP16-110F | 8.2 | 14.2 | 5.1 | 7.6 | 3.0 | 0.9 | 1 | 0.5 |
| DWP16-120F | 7.7 | 12.6 | 5.1 | 7.6 | 3.0 | 0.9 | 3 | 0.5 |
| DWP16-135F | 9.0 | 14.5 | 5.1 | 7.6 | 3.0 | 0.9 | 1 | 0.5 |
| DWP16-160F | 9.0 | 17.9 | 5.1 | 7.6 | 3.0 | 0.9 | 1 | 0.5 |
| DWP16-185F | 11.0 | 16.7 | 5.1 | 7.6 | 3.0 | 0.9 | 1 | 0.5 |
| DWP16-200F | 13.0 | 18.0 | 5.1 | 7.6 | 3.0 | 1.1 | 3 | 0.5 |
| DWP16-250F | 11.5 | 19.0 | 5.1 | 7.6 | 3.0 | 0.9 | 1 | 0.5 |
| DWP16-300F | 8.5 | 15.5 | 5.1 | 7.6 | 3.0 | 1.2 | 2 | 0.8 |
| DWP16-400F | 9.2 | 16.5 | 5.1 | 7.6 | 3.0 | 1.2 | 2 | 0.8 |
| DWP16-500F | 11.1 | 15.5 | 5.1 | 7.6 | 3.0 | 1.2 | 2 | 0.8 |
| DWP16-600F | 11.4 | 19.0 | 5.1 | 7.6 | 3.0 | 1.2 | 2 | 0.8 |
| DWP16-700F | 12.5 | 22.5 | 5.1 | 7.6 | 3.0 | 1.2 | 2 | 0.8 |
| DWP16-800F | 12.5 | 22.5 | 5.1 | 7.6 | 3.0 | 1.2 | 2 | 0.8 |
| DWP16-900F | 15.5 | 23.0 | 5.1 | 7.6 | 3.0 | 1.2 | 2 | 0.8 |
| DWP16-1000F | 17.2 | 27.0 | 5.1 | 7.6 | 3.0 | 1.2 | 2 | 0.8 |
| DWP16-1100F | 17.2 | 27.0 | 5.1 | 7.6 | 3.0 | 1.2 | 2 | 0.8 |
| DWP16-1200F | 18.2 | 29.0 | 10.2 | 7.6 | 3.4 | 1.4 | 2 | 0.8 |
| DWP16-1400F | 24.0 | 28.7 | 10.2 | 7.6 | 3.4 | 1.4 | 2 | 0.8 |

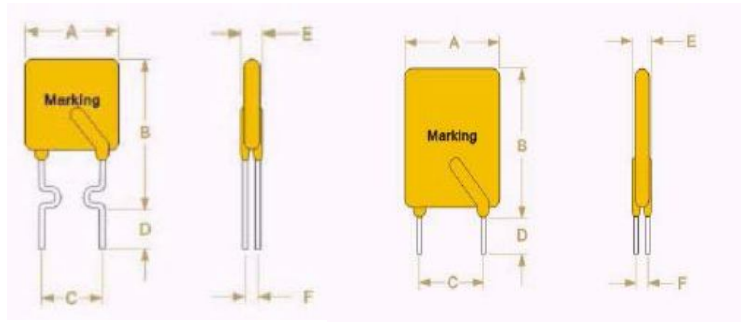

Style 1

Style 2

Marking system

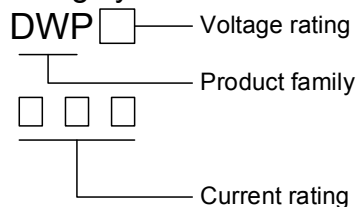

Style 3

* Lead materials: Tin-plate metal wire.

* Lead-free devices are available,
the right logo is lead-free mark.





Electrical Characteristics

| Part number | I _H (A) | I _T (A) | Max. Time-to-trip | | T _{trip} (S) | V _{max} (V) | I _{max} (A) | Pd _{typ} (W) | R _{min} (Ω) | R _{1max} (Ω) |
|-------------|-----------------------|-----------------------|-------------------|---------|--------------------------|-------------------------|-------------------------|--------------------------|-------------------------|--------------------------|
| | | | Current(A) | Time(s) | | | | | | |
| DWP16-075F | 0.75 | 1.30 | 3.75 | 0.4 | 0.4 | 16 | 40 | 0.30 | 0.14 | 0.23 |
| DWP16-090F | 0.90 | 1.80 | 4.50 | 1.2 | 1.2 | 16 | 40 | 0.60 | 0.10 | 0.18 |
| DWP16-110F | 1.10 | 2.20 | 5.50 | 2.3 | 2.3 | 16 | 40 | 0.70 | 0.08 | 0.14 |
| DWP16-120F | 1.20 | 2.00 | 6.00 | 3.5 | 3.5 | 16 | 40 | 0.60 | 0.08 | 0.14 |
| DWP16-135F | 1.35 | 2.70 | 6.75 | 4.5 | 4.5 | 16 | 40 | 0.81 | 0.06 | 0.12 |
| DWP16-160F | 1.60 | 3.20 | 8.00 | 9.0 | 9.0 | 16 | 40 | 0.90 | 0.05 | 0.11 |
| DWP16-185F | 1.85 | 3.70 | 9.25 | 10.0 | 10.0 | 16 | 40 | 1.00 | 0.05 | 0.09 |
| DWP16-200F | 2.0 | 4.0 | 10.0 | 10.0 | 10.0 | 16 | 40 | 1.00 | 0.040 | 0.080 |
| DWP16-250F | 2.50 | 5.00 | 12.50 | 10.0 | 10.0 | 16 | 40 | 1.21 | 0.03 | 0.06 |
| DWP16-300F | 3.0 | 5.1 | 15.0 | 2.0 | 2.0 | 16 | 100 | 2.3 | 0.034 | 0.105 |
| DWP16-400F | 4.0 | 6.8 | 20.0 | 3.5 | 3.5 | 16 | 100 | 2.4 | 0.020 | 0.063 |
| DWP16-500F | 5.0 | 8.5 | 25.0 | 3.6 | 3.6 | 16 | 100 | 2.6 | 0.014 | 0.044 |
| DWP16-600F | 6.0 | 10.2 | 30.0 | 5.8 | 5.8 | 16 | 100 | 2.8 | 0.009 | 0.030 |
| DWP16-700F | 7.0 | 11.9 | 35.0 | 8.0 | 8.0 | 16 | 100 | 3.0 | 0.006 | 0.021 |
| DWP16-800F | 8.0 | 13.6 | 40.0 | 9.0 | 9.0 | 16 | 100 | 3.0 | 0.005 | 0.018 |
| DWP16-900F | 9.0 | 15.3 | 45.0 | 12.0 | 12.0 | 16 | 100 | 3.3 | 0.004 | 0.015 |
| DWP16-1000F | 10.0 | 17.0 | 50.0 | 12.5 | 12.5 | 16 | 100 | 3.3 | 0.003 | 0.012 |
| DWP16-1100F | 11.0 | 18.7 | 55.0 | 13.5 | 13.5 | 16 | 100 | 3.7 | 0.003 | 0.010 |
| DWP16-1200F | 12.0 | 20.4 | 60.0 | 16.0 | 16.0 | 16 | 100 | 4.2 | 0.002 | 0.009 |
| DWP16-1400F | 14.0 | 23.8 | 70.0 | 20.0 | 20.0 | 16 | 100 | 4.6 | 0.0014 | 0.0080 |

I_H=Hold current: maximum current at which the device will not trip at 25°C still air.

I_T=Trip current: minimum current at which the device will always trip at 25°C still air.

T_{trip}=Maximum time to trip at 5 times hold current (i.e. 5*I_H).

V_{max}=Maximum voltage device can withstand without damage at rated current.

I_{max}=Maximum fault current device can withstand without damage at rated voltage.

Pd_{typ}=Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R_{min}=Minimum device resistance at 25°C prior to tripping.

R_{1max}=Maximum resistance of device when measured one hour post trip at 25°C.

Thermal Derating Chart-I_H(A)

| Part number | Maximum ambient operating temperatures(°C) | | | | | | | | | |
|-------------|--|------|------|------|------|------|------|------|------|--|
| | -40 | -20 | 0 | 25 | 40 | 50 | 60 | 70 | 85 | |
| DWP16-075F | 1.05 | 0.95 | 0.85 | 0.75 | 0.65 | 0.60 | 0.55 | 0.50 | 0.43 | |
| DWP16-090F | 1.40 | 1.25 | 1.10 | 0.90 | 0.75 | 0.69 | 0.65 | 0.60 | 0.50 | |
| DWP16-110F | 1.75 | 1.52 | 1.33 | 1.10 | 0.99 | 0.90 | 0.80 | 0.73 | 0.63 | |
| DWP16-120F | 1.69 | 1.52 | 1.36 | 1.20 | 1.04 | 0.96 | 0.88 | 0.80 | 0.68 | |
| DWP16-135F | 2.15 | 2.21 | 1.94 | 1.60 | 1.42 | 1.31 | 1.19 | 1.03 | 0.88 | |
| DWP16-160F | 2.49 | 2.21 | 1.94 | 1.60 | 1.42 | 1.31 | 1.19 | 1.03 | 0.88 | |
| DWP16-185F | 2.87 | 2.59 | 2.28 | 1.85 | 1.63 | 1.52 | 1.33 | 1.21 | 1.05 | |
| DWP16-200F | 3.45 | 3.04 | 2.55 | 2.00 | 1.68 | 1.46 | 1.33 | 1.21 | 1.03 | |
| DWP16-250F | 3.82 | 3.44 | 3.03 | 2.50 | 2.17 | 2.00 | 1.81 | 1.59 | 1.39 | |
| DWP16-300F | 4.4 | 4.0 | 3.6 | 3.0 | 2.6 | 2.4 | 2.1 | 1.9 | 1.4 | |
| DWP16-400F | 5.9 | 5.3 | 4.8 | 4.0 | 3.5 | 3.2 | 2.8 | 2.5 | 1.9 | |
| DWP16-500F | 7.3 | 6.6 | 6.0 | 5.0 | 4.4 | 4.0 | 3.6 | 3.1 | 2.4 | |
| DWP16-600F | 8.8 | 8.0 | 7.2 | 6.0 | 5.2 | 4.8 | 4.2 | 3.8 | 2.8 | |
| DWP16-700F | 10.3 | 9.3 | 8.4 | 7.0 | 6.2 | 5.6 | 5.0 | 4.4 | 3.3 | |
| DWP16-800F | 11.7 | 10.7 | 9.6 | 8.0 | 6.9 | 6.4 | 5.6 | 5.1 | 3.7 | |
| DWP16-900F | 13.2 | 11.9 | 10.7 | 9.0 | 7.9 | 7.2 | 6.4 | 5.6 | 4.2 | |
| DWP16-1000F | 14.7 | 13.3 | 12.0 | 10.0 | 8.7 | 8.0 | 7.0 | 6.3 | 4.7 | |
| DWP16-1100F | 16.1 | 14.6 | 13.1 | 11.0 | 9.7 | 8.8 | 7.8 | 6.9 | 5.2 | |
| DWP16-1200F | 17.6 | 16.0 | 14.4 | 12.0 | 10.4 | 9.6 | 8.4 | 7.6 | 5.6 | |
| DWP16-1400F | 20.5 | 18.7 | 16.8 | 14.0 | 12.1 | 11.2 | 9.8 | 8.9 | 6.5 | |




Test Procedures And Requirements


| Test | Test Conditions | Accept/Reject Criteria |
|-----------------|-------------------------------------|-------------------------------|
| Resistance | In still air @ 25°C | $R_{min} \leq R \leq R_{max}$ |
| Time to Trip | Specified current, V_{max} , 25°C | $T \leq$ maximum Time to Trip |
| Hold Current | 30min, at I_H | No trip |
| Trip Cycle Life | V_{max} , I_{max} , 100cycles | No arcing or burning |
| Trip Endurance | V_{max} , 24hours | No arcing or burning |

Typical Time-to-Trip Charts at 25°C

- A=DWP16-300F
- B=DWP16-400F
- C=DWP16-500F
- D=DWP16-600F
- E=DWP16-700F
- F=DWP16-800F
- G=DWP16-900F
- H=DWP16-1000F
- I=DWP16-1100F
- J=DWP16-1200F
- K=DWP16-1400F

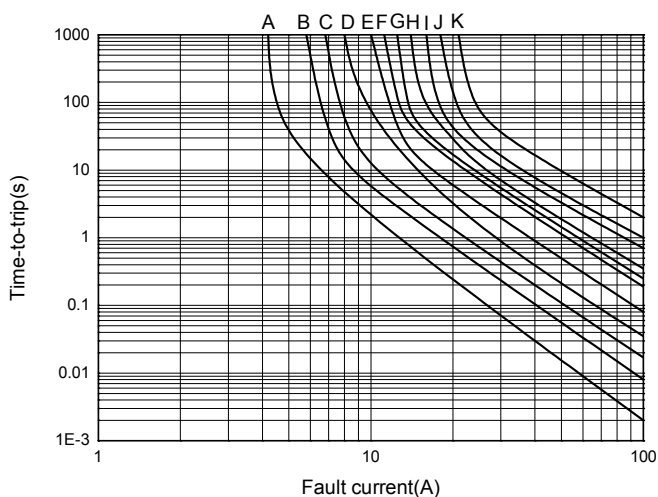

- A'=DWP16-075F
- B'=DWP16-090F
- C'=DWP16-110F
- D'=DWP16-120F
- E'=DWP16-135F
- F'=DWP16-160F
- G'=DWP16-185F
- H'=DWP16-200F
- I'=DWP16-250F

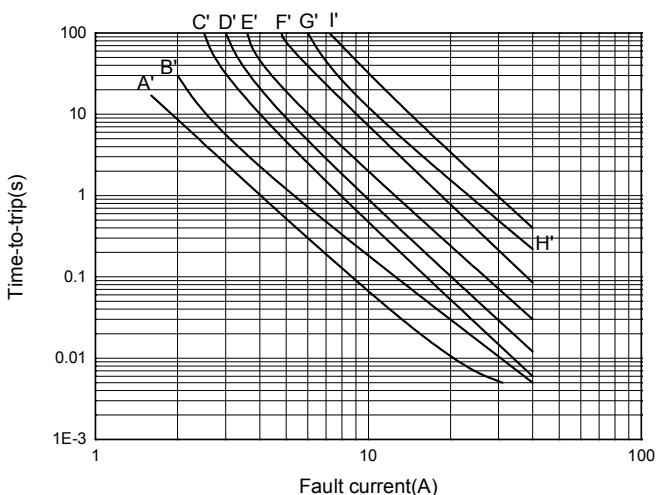

Package Information

Bulk:
DWP16-075F~DWP16-1200F500pcs per bag
DWP16-1400F.....250pcs per bag